A WATER FED POLE SYSTEM

ANGLE ADAPTER



Modular angle adapter system: Clean hard-to-reach places



Another clever feature of the new **nLITE®** pole system is the modular angle system, in which you can combine four individual elements in any number of variants in order to easily reach places that are difficult to access. Whether conservatories or overhanging façade elements, this system gives you the perfect angle for every application.



FASTLOCK

With a single click: simple, fast, and stable connection for every work situation:


- Change brushes in seconds
- Adjust brush angle in 45° stages
- No twisting when cleaning!



Choose from three pre-configured angle adapter kits:

Simply adapt the modular angle adapter individually to your application

- A Pole adapter
- Brush adapter
- Angle element short
- Angle element long

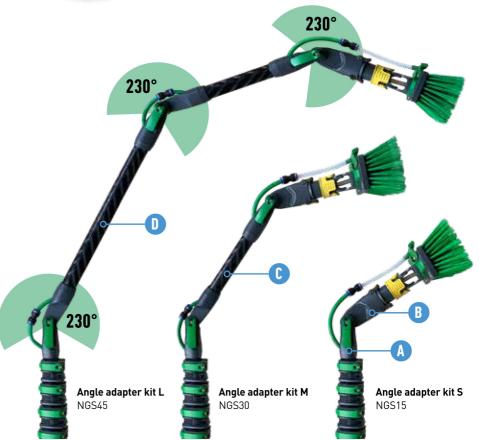

(A) WATER FED POLE SYSTEM

ANGLE ADAPTER KITS/ACCESSORIES





nLITE® ANGLE ADAPTER KITS

For nLITE® CarbonComposite and Carbon 24K telescopic poles.

Part No.	Info	Length	Pack
NGS15	Angle adapter kit S	15 cm	1
NGS30	Angle adapter kit M	42 cm	1
NGS45	Angle adapter kit L	82 cm	1

Not compatible with nLite® Connect poles.





nLITE® HOSES & ACCESSORIES				
Part No.	Info	Ø	Pack	
DLS25	DuroFlex hose 25m	Ø 5/8 mm	1	
DLH25	DuroFlex High Performance hose 25m	Ø 7/10 mm	1	
NLWVI	Water flow regulator for DLS25	Ø 5/8 mm	1	
22812	Water flow regulator for DLH25	Ø 7/10 mm	1	





nLITE® THREAD ADAPTER

Thread adapters for attaching brushes and tools on the new nLITE® telescopic poles

Part No.	Products	Pack
NLTHR	Euro thread adapter for brushes	1
NLCLA	Adapter for classic cleaning tools	1



nLITE® TRANSPORTATION BAG

Solid nylon carrying bag* for new nLITE® water-fed poles and brushes. - Comfortable and easy to transport with a handle or adjustable shoulder strap

- Offers space for up to 5 poles, 2 brushes, 1 hose, 1 angle adapter, 1 extension adapter
- + two easy-to-reach outer pockets for accessories

Part No.	Pack
NLBAG	1

^{*} not compatible with the nLite Connect system

nLITE® HOSE ROUTING:

Inner hose routing



Insert the hose at the bottom of the pole, lead it out at the top, through the angle adapter and connect it there with the quick



end of the telescopic pole (CF86G only), hose is led out to the side.

2. Insert the extension pole (CF33G) into the NLHCC adapter. Protective cap is open for pole connection.

External hose routing



Fit hose clips NLHKP into the clips of the nLITE telescopic pole. Guide the hose through the clips on the outside of the pole and connect it to the angle adapter using the quick connector on the angle adapter.